


## LE5 BODY WORN CAMERA

The LE5 is an easy to operate wearable video camera designed specifically for law enforcement and security professionals.

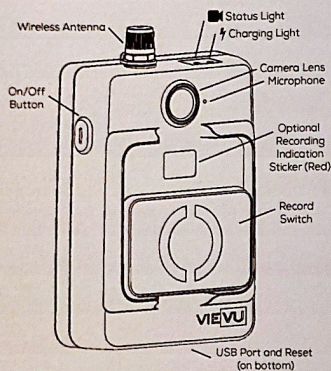

## TECHNICAL SPECIFICATIONS

Video Resolution	1080 (FHD), 720 (HD) or 848x480 (SD)
Recording Speed	30 Frames Per Second
Recording Format	MPEG-4, H.264 Codec, AVI container
Lens Field of View	120, 95, 70 degrees selectable
Recording Life	Over 12 hours*
Storage Capacity	64 GB (non-removable)
Video Storage	56 hours at SD Resolution*
Weight (no clip)	4.9 oz
Dimensions (no clip)	2.52" x 3.40" x 1.10"
Input	DC 5V
Temperature	-4°F - 122°F

\* Environmental conditions may increase or decrease specification

## LED LIGHTS

### STATUS LIGHT

Fast Blink Blue:

Solid Red:

Slow Blink Green:

Fast Blink Yellow:

Solid Yellow:

Slow Blink White:

Solid Blue:

Slow Blink Blue:

### CHARGING LIGHT

Solid Red:

Solid Green:

If Covert Mode is enabled, LED lights will not illuminate. Vibration will be enabled to indicate when the camera starts and stops recording.

## RECORDING INDICATION STICKER (OPTIONAL)

A red sticker is included that can be placed between the camera lens and microphone. This will give others a visual indication when the camera is recording video.

## NEED HELP?

Phone: 888-285-4548


Email: [support@viewu.com](mailto:support@viewu.com)

Rev1

VIEVU

645 Elliott Ave W Ste 370 Seattle WA 98119

**SAFARILAND®**  
**VIEVU®**

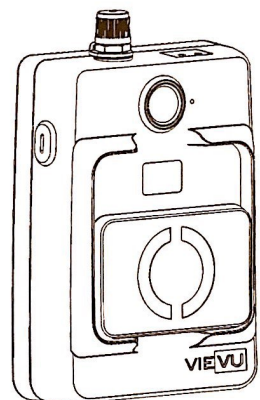

**LE5™**

**INSTRUCTIONS**

## FIRST TIME SETUP

### 1. SELECT YOUR SOFTWARE

Go to [www.viewu.com/LE5setup](http://www.viewu.com/LE5setup) and complete the sign-up process. After sign-up is complete, you will receive a welcome email with additional information.

### 2. INSTALL SOFTWARE ON COMPUTER

The welcome email will contain a link to the software to install. Contact VIEVU support at 888-285-4548 if you need assistance.

### 3. ASSIGN THE CAMERA

**NOTE:** All cameras must be assigned to a user before recording video. Failure to assign the camera will prevent downloading videos.

Using the supplied cable, connect the 2 large USB connectors to the computer. Connect the small connector to the bottom of the camera. Click the 'Assign Camera' button in the software. For complete steps, consult the User Guides found in the welcome email.

## USING THE CAMERA

### CHARGING THE BATTERY

Before use, the camera must be fully charged. An optional wall charger is available for purchase at [www.viewu.com/accessories](http://www.viewu.com/accessories).

1. Using the supplied cable, connect the 2 large USB connectors to the computer. Connect the small connector to the bottom of the camera.
2. The charging light is solid red while the battery is charging. The charging light is solid green when the battery is fully charged.


## MOUNTING OPTIONS

The camera is fitted with a ClipLock mounting adapter and a spring clip. Additional mounting options are available at [www.viewu.com/accessories](http://www.viewu.com/accessories).

### USING CLIPLOCK™

ClipLock is an interchangeable clip attachment system. Visit [www.viewu.com/cliplock](http://www.viewu.com/cliplock) for a video demonstration.

To use, rotate the camera 90 degrees to align the T-adapter with the receiver slot on the clip. Insert the adapter into the clip. Turn the camera back 90 degrees. Slide the camera down into the locked position.



### WEARING THE CAMERA

The camera must be worn with the LED lights facing up. The ideal position to attach the camera is level with the sternum but will vary depending on the user.



## RECORDING VIDEO



**START RECORDING**  
Slide the record switch down.  
The camera status light will blink green.



**STOP RECORDING**  
Slide the record switch up.

## CONNECTING TO A SMARTPHONE

To connect the camera to a smartphone, the camera must be turned On. Consult the User Guides found at [www.viewu.com/support](http://www.viewu.com/support) for complete steps for your device.

## DOWNLOADING VIDEO

### CABLE DOWNLOAD

1. Using the supplied cable, connect the 2 large USB connectors to the computer. Connect the small connector to the bottom of the camera.
2. Login to the VIEVU software to download. Consult the User Guides found at [www.viewu.com/support](http://www.viewu.com/support) for complete steps.

### DOCKING STATION DOWNLOAD

Insert the camera into an available port on the docking station. The status light will turn blue when the camera is in queue to download. The light will change to blinking blue when video files are being downloaded. The light will turn off when the download process is complete.



# LIMITED WARRANTY

**Product Warranty.** Company warrants to purchaser that the Products purchased here under shall be free from defects in materials and workmanship and shall conform in all material respect to the specifications for a period of ninety (90) days from the date of delivery thereof, provided the Product in question has been stored and used in accordance with ordinary industry practices and conditions. The use of non-Company branded or approved accessories or replacement parts may result in damage not covered by warranty. Company does not warrant that the operation of the products will be uninterrupted or error free.

**Remedies.** In the event that a Product does not comply with the product warranty set out above and such non-conforming Product is returned to Company within the warranty period by Purchaser freight prepaid, Company will repair or replace such non-conforming Product at no additional charge to Purchaser; the repaired or replaced Product will be returned to Purchaser, freight prepaid.

**Disclaimer of Warranties.** The foregoing express warranties are limited to company and are not transferable and are in lieu of any other warranty by Company with respect to Products furnished hereunder. Company grants no other warranty, either express or implied, including without limitation, warranties or merchantability or fitness for a particular purpose.

**Limitation of Liability.** Company shall in no event be liable for any indirect, incidental, special or consequential damages arising out of or relating to the sale or use of its products, whether or not Company has advance notice of the possibility of such damages. If company breaches any provision of this agreement, purchaser's sole and exclusive maximum liability, whether based in contract, tort or otherwise, shall not in any event exceed the contract price for the particular products.

**Video Recovery Disclaimer:** Purchaser is responsible for maintaining all evidence and videos taken with Company products. Purchaser should download all videos from Company products before returning to Company for repair or replacement. Purchaser shall indemnify Company for any evidence or videos that cannot be recovered from products.

**Caution:** Risk of explosion or fire if battery is disassembled, punctured, cut, crushed, short-circuited, incinerated, or exposed to water, fire, or high temperatures. Properly dispose of used batteries in accordance with local regulations.



## FCC CLASS B NOTICE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Important: Changes or modifications to this product not authorized by VIEVU® could void the electromagnetic compatibility (EMC) and wireless compliance and negate your authority to operate the product. This product has demonstrated EMC compliance under conditions that include the use of compliant peripheral devices and shielded cables between system components. It is important that you use compliant peripheral devices and shielded cables between system components to reduce the possibility of causing interference to radios, televisions, and other electronic devices. This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment for body-worn configuration in direct contact to the phantom. This device meets the government's requirements for exposure to radio waves. This device is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government. The exposure standard for wireless devices employing a unit of measurement is known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6W/kg. The FCC has granted an Equipment Authorization for this device with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines. SAR information on this device is on file with the FCC and can be found under the Display Grant section of [www.fcc.gov/oet/ea/fccid](http://www.fcc.gov/oet/ea/fccid) after searching FCC ID: 2ABBNLE5